





Congratulations, you have purchased the finest exhaust system for your motorcycle on the market. Your Vance & Hines exhaust system is designed and crafted for maximum performance, a perfect fit, a great sound and unbeatable style. Please follow the installation instructions below and if you have any questions, please call our technical support line at (562) 926-5291.

Attention installer (if other than owner), please forward this instruction sheet to the owner of this product. These instructions contain valuable information to the end user.

**TOOLS
REQUIRED**



Flat blade screwdriver or
5/16" nutdriver




10mm, 12mm, 7/16" & 1/2" wrenches
5, 6mm Allen wrenches

READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

STOCK EXHAUST SYSTEM REMOVAL


1. This exhaust system is specifically designed for California models. Before continuing be sure it is the correct system for your application.
2. Loosen clamp that connects muffler to front head pipe.
3. Remove cylinder exhaust bolts from rear head pipe that connects rear head pipe to cylinder (save for re-use).
4. Remove bolts that connect mufflers to mounting bracket. Remove complete system. Note: Assistance may be required.
5. Remove stock mounting bar.

FIGURE 1

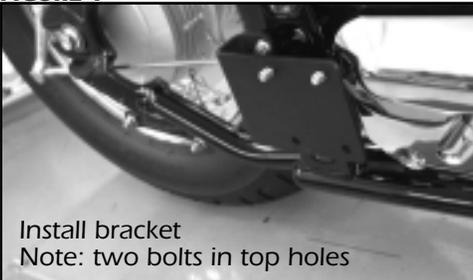


Install bracket
Note: two bolts in top holes

FIGURE 2

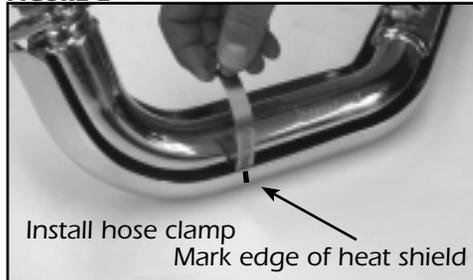


Install hose clamp
Mark edge of heat shield

FIGURE 3

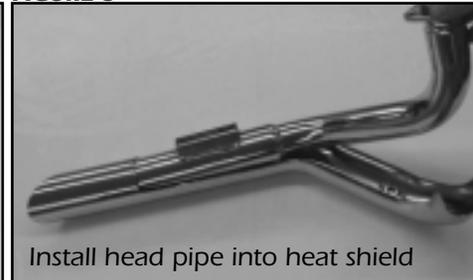

Install head pipe into heat shield

FIGURE 4

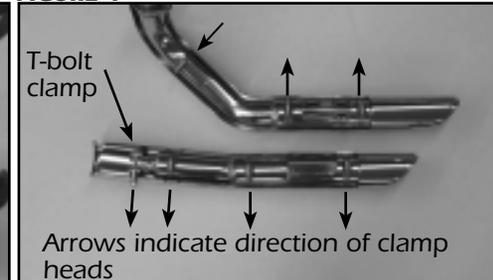

T-bolt clamp
Arrows indicate direction of clamp heads

FIGURE 5




T-bolt clamp position (shown without heat shield)

FIGURE 6



Install nutplate

FIGURE 7

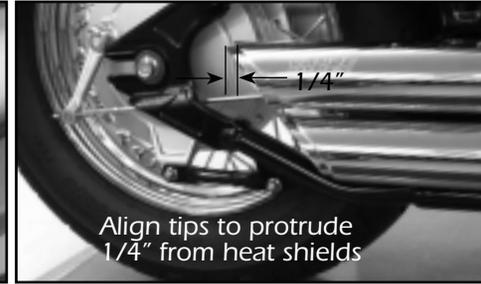

Align tips to protrude 1/4" from heat shields

VANCE & HINES EXHAUST SYSTEM INSTALLATION


1. Check condition of stock exhaust gasket. Replace if damaged or worn.
2. Install mounting bracket (stamped 384-P) in the original bracket mounting position using two 8mm bolts (supplied)(Figure 1). Note: Install two 5/16" x 5/8" flange bolts (supplied)(Figure 1) into top holes of bracket before installing bracket onto motorcycle.
3. Mark outside surface of front and rear heat shields with location of mounting clips that are welded to the inside (Figure 2). Place each heat shield on a non abrasive surface such as a blanket or carpet. Lay each head pipe/muffler onto its respective heat shield (Figure 3).
4. Loosely install each hose clamp by feeding tail end of clamp into heat shield clip (Figure 2). #20 hose clamps are for head pipes and #28 hose clamps for muffler area. Take note of clamp screw head direction (Figure 4). Screw head should be accessible when system is installed on motorcycle for adjustment purposes. Note: Do not tighten yet.
5. Install T-bolt clamp onto front muffler (Figure 4&5). Slide muffler onto front head pipe. Slide nut plate (supplied) inside bracket welded to backside of front muffler (Figure 6). Attach muffler to mounting bracket 384-P using two 5/16" flange bolts (supplied) engaging nut plate. Leave head pipe/muffler assembly loose at this time.
6. Using stock Allen bolts, carefully install rear head pipe/ muffler assembly into exhaust port. (Assistance may be required). Note: Do not tighten yet.
7. Slide nut plate (supplied) inside bracket welded to backside of rear muffler (Figure 6).
8. Align mufflers so they are parallel when viewed from the right side of the motorcycle and muffler tips align at the same length. Tighten 5/16" flange bolts securing mufflers to bracket.
9. Tighten cylinder exhaust port bolts securing head pipes to cylinder head.
10. Tighten T-bolt clamp securing front muffler to head pipe.
11. Adjust heat shields so that muffler tips protrude 1/4" from heat shields (Figure 7) and rotation of heat shield matches muffler tip. Tighten all hose clamps securing heat shields.
12. After installation and before starting motorcycle, completely clean pipes and mufflers with cleaning solvent and a clean, soft cloth that will not leave a residue. Note: Any residue, oil, or fingerprints will stain the chrome when the metal heats up.
13. All hardware must be properly tightened before starting motorcycle.

EXHAUST CARE - HELPFUL HINTS TO AVOID DISCOLORATION OF EXHAUST SYSTEM

1. When installing a new set of chrome pipes, make sure your hands are clean and free of oil. After installation, thoroughly clean pipes with a soft cloth and cleaning solvent that will leave no residue (chrome wax / polish, glass cleaner, alcohol, ammonia, etc...) before starting the motorcycle.
2. Follow owners manual instructions regarding use of the choke (starter enricher). If left on longer than recommended, discoloration may be accelerated.
3. Avoid long periods of idling as this can cause discoloration.
4. Intake leaks can cause the engine to run lean and overheat, this could lead to discoloration.
5. Make sure there are no exhaust leaks at the junction of the exhaust pipes and cylinder head. We recommend replacing gaskets if they are worn.

VANCE & HINES OPTIONAL ACCESSORIES

QUIET BAFFLE



Quiet baffle P/N 21301 is available for this system. The quiet baffle will lower the sound level by 2-3db on average. Contact your local dealer to order.

RE-JETTING FOR CARBURETED MODELS:


Re-jetting the carburetors will result in realizing the "full" potential of this performance exhaust system. Vance & Hines offers Jet Kits for most applications, call (562) 921-7461 for more information.

PLEASE NOTE:


Every effort is made for Vance & Hines Exhaust Systems to provide improved cornering clearance. However, due to design and space limitations on some motorcycle models, ground and cornering clearance may not be improved and in some cases may be reduced. Be sure to follow proper installation instructions.

PACKING LIST


ALL PARTS SHOWN ARE ACTUAL SIZE

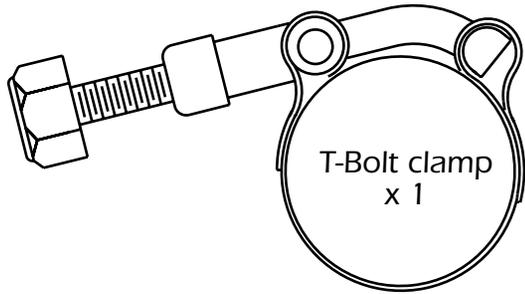


T-Bolt clamp
x 1

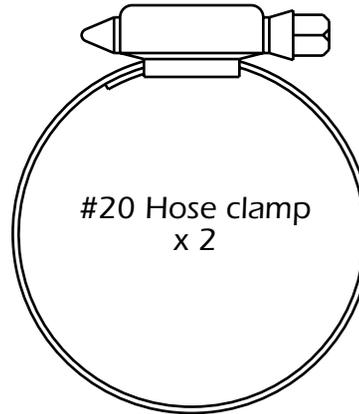

#20 Hose clamp
x 2

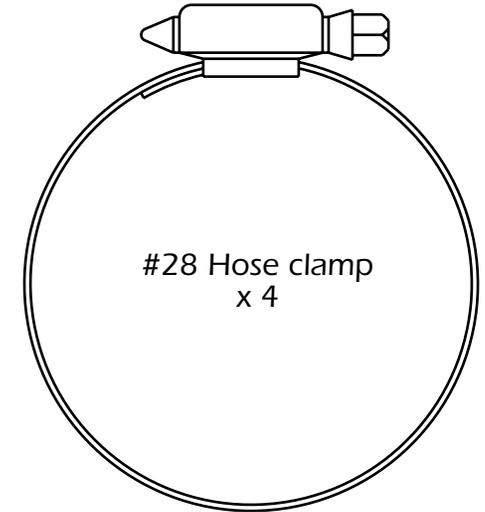


#28 Hose clamp
x 4



8 x 20mm
flange bolt x 2



5/16" x 5/8"
flange bolt x 4

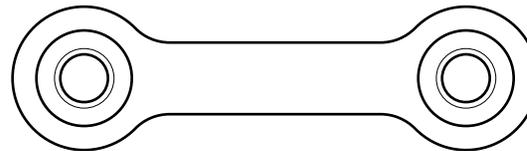

Nut plate
x 2

PARTS NOT SHOWN:

- 384-P Bracket x 1
- Y275FC Front head pipe assembly x 1
- Y276FC Rear head pipe assembly x 1
- Y275HC Front heat shield x 1
- Y276HC Rear heat shield x 1

WARRANTY

Vance & Hines exhaust systems are warranted against defects in material and workmanship for a period of 90 days from the date of purchase from an authorized dealer. This warranty does not cover discoloration of chrome finishes. This warranty is limited to the repair or replacement of a product proven to be defective from normal use. Vance & Hines exhaust systems are designed to fit and operate on OEM motor and chassis. This warranty does not cover any product subject to abuse, misuse, improper installation or modification.



Big Radius

SM	24024
MD	24025
LG	24026
XL	24027
XXL	24028

Sideshots Vertical

SM	24029
MD	24030
LG	24031
XL	24032
XXL	24033

V-Rod

SM	24034
MD	24035
LG	24036
XL	24037
XXL	24038

Sideshots Cubed

SM	24039
MD	24040
LG	24041
XL	24042
XXL	24043

GET YOUR LIMITED EDITION VANCE & HINES T-SHIRT. ALL T-SHIRTS ARE BLACK, HIGH QUALITY, 100% COTTON AND MADE IN THE U.S.A. CALL TO ORDER: (562) 921-7461

13861 ROSECRANS AVENUE / SANTA FE SPRINGS, CA 90670
SALES: (562) 921-7461 / TECHNICAL: (562) 926-5291 / FAX: (562) 802-0110
VANCEANDHINES.COM